

# STANDARD COLD WARRIOR / PROTECTOR ENCLOSURES

## INTERNAL DIMENSIONS



<b>CW-2 Insulated</b>	<b>15" W x 27" H x 28" L</b>	<b>Lift-Off</b>
<b>CW-4 Insulated</b>	<b>16" W x 31 1/2" H x 43" L</b>	<b>Lift-Off</b>
<b>P-2</b>	<b>15" W x 27" H x 28" L</b>	<b>Lift-Off</b>
<b>P-4</b>	<b>16" W x 31 1/2" H x 43" L</b>	<b>Lift-Off</b>

### NOTES:

Materials pass the following tests  
Density as measured by the ASTM D-4883 and/or ASTM D-1505 methods. Tensile strength yield test as measured by ASTM D-638 and the environmental stress crack resistance test as measured by ASTM D-1693.

## GENERAL SPECIFICATIONS

- Enclosures to be 3/16" thick LL8460 Linear Low Density Hexene Copolymer Resin.
- Color shall be Dark Green or Light Tan.
- Insulated enclosures to be internally coated with ceramic insulated coating.
- Insulation application rate shall be 100 sf/gallon or 14-16 mils in thickness, providing a R19 Insulation Value.
- Insulated enclosures shall be ASSE 1060 Class II Certified.
- Enclosures shall have 2 integrated Lock Shield Brackets (LSB).
- Enclosures shall be manufactured with two 6" x 2 1/2" openings with gates attached to allow water drainage.
- All hardware shall be securely attached to enclosures.

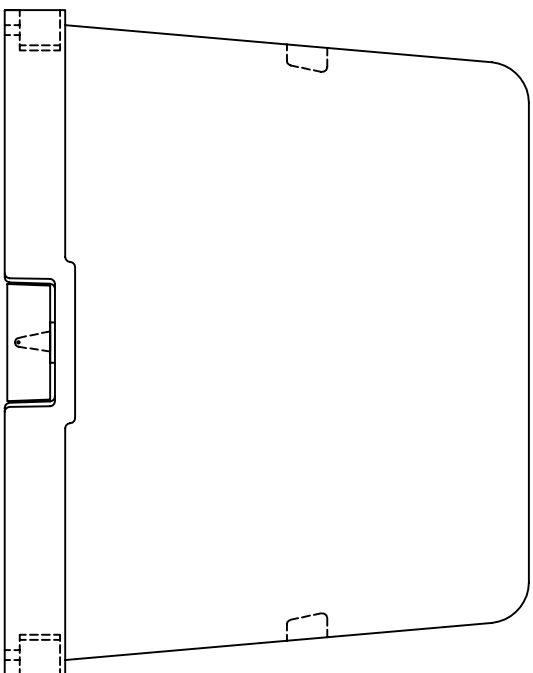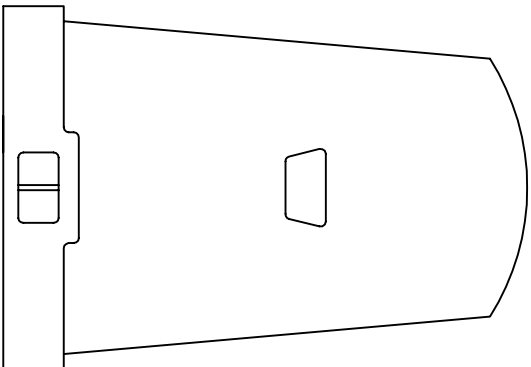

BPD-GuardShack Enclosures  
 3831 E. GROVE STREET  
 PHOENIX, ARIZONA 85040 (602) 426-1002

# GENERAL SPECIFICATIONS FOR COLD WARRIOR / PROTECTOR ENCLOSURES

SCALE: NTS  
 DETAIL NO.  
 BPD-CW - P  
 REV. 0