

THE COLD WARRIOR



AND THE PROTECTOR



INSULATED AND UNINSULATED
ENCLOSURES BY

GUARDSHACK™

The Cold Warrior Insulated Enclosures and The Protector Uninsulated Enclosures have a reputation for durability and strength. Both lines of enclosures come in Forest Green & Woodland Tan colors. Both lines consist of 2 sizes, designed to protect all your 1/2"-2" backflow assemblies, even two next to each other!

The Safe, Beautiful Way To Protect Your 1/2"-2" Backflow Assemblies

COLD WARRIOR



Cold Warrior Insulated Enclosure Standard Features:

- **ASSE 1060 Certified**
- **Ceramic Insulating Coating** provides **R19** insulation value, exceeding twice the ASSE minimum required insulation.
- **Linear Low Density Polyethylene** body with built-in UV inhibitors, resists baseball bats and graffiti equally well.
- **Vandal & Theft Resistant** built-in LockShield Brackets and Case Hardened Eyebolts help resist the bolt cutters and the reciprocating saws that so easily break into other leading competitor's models.
- **Floodgate Drainage Doors** (instead of open holes) release water, but keep the warmth in and critters out.
- **Lightweight, Lift-Off Design** means complete access for testing and service work for over 126 makes, models and sizes of backflow assemblies.

PROTECTOR

Protector Uninsulated Enclosure Standard Features:

- **Un-Insulated Enclosure** - If cold weather is not a major concern for you, the Protector has all the same features as the Cold Warrior except for the ceramic insulating coating, making a great buy even better!

GuardShack Enclosures is a division of B.P.D.I.
www.GuardShackEnclosures.com



THE COLD WARRIOR



& THE PROTECTOR

INSULATED AND UNINSULATED ENCLOSURES

HEAT TAPE

This ready-to-install system comes in one compact package complete with grounded plug, thermostat and easy-to-follow instructions. Construction includes braided metal jacket for ground, black outer jacket, thermostat, 2 foot orange 18/3 supply cord with grounded plug and integral power indicator light.



Cold Warrior and Protector Enclosures		
MODEL:	Internal Dimensions	External Dimensions
	W" x H" x L"	W" x H" x L"
CW-2 or P-2	15 x 27 x 28	19 x 27 x 34
CW-4 or P-4	16 x 31½ x 43	20 x 31½ x 49½

Heat Tape	
MODEL #	Descriptions
GS-HT-6	6' Length, 21 WATTS
GS-HT-12	12' Length, 84 WATTS
GS-HT-18	18' Length, 126 WATTS


MATERIAL SPECIFICATIONS:

The Cold Warrior and the Protector series are manufactured with an LL8460 linear low density hexene copolymer resin designed to offer excellent strength and environmental stress crack resistant characteristics. This resin is ideally suited for applications that require balance between stiffness and low temperature toughness.

Material passes the following tests: Density as measured by the ASTM D4883 and/or ASTM D-1505 methods. Tensile strength yield test as measured by ASTM D-638 and the environmental stress crack resistance test as measured by ASTM D-1693

The Cold Warrior (Only): Internal application of ceramic insulated coating. Application rate is 100 sf/gal or 14-16 mils in thickness, providing a R19 insulation value.

3/16" Linear Low Density Polyethylene w/ ceramic insulated coating inside

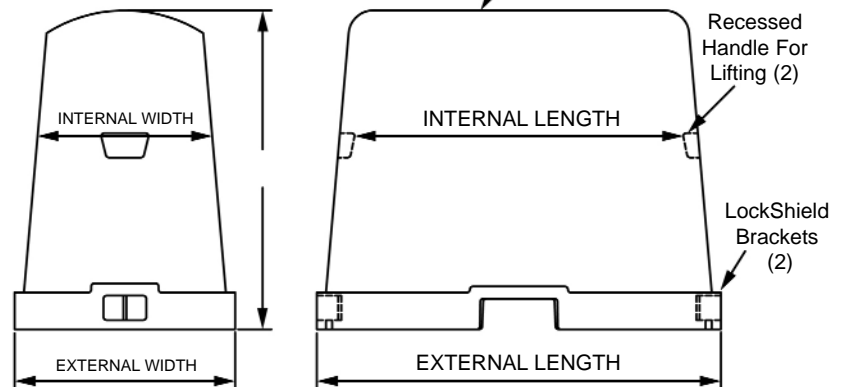

WARRANTY: BPDI warrants this product for one (1) year from date of purchase to be free of defects in material and workmanship. All claims must be made known to BPDI in writing within 30 days of the defect becoming known to the purchaser. There are no warranties that extend beyond those described herein, either expressed or implied. BPDI reserves the sole right, at its own option, to repair or replace any defective product, and shall exclude any damage caused by accident, misuse or abuse of the product. In no case shall BPDI be liable for any incidental or consequential damages what-so-ever.

GUARDSHACK™

ENCLOSURES

3831 E Grove St. Phoenix, Az 85040
 P: 1-800-266-5411 F: 602-426-1005
www.GuardShackEnclosures.com